



Orwak 5030-CE

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving

Features

- Top loading
- Single phase
- For compacting Tetra containers or pouches and separation of liquids





Technical specifications

Dimensions 5030-CE

- A: 6'5"
- B: 31"
- C: 40"
- D: 8'9"
- E: 44"

*Emptying position

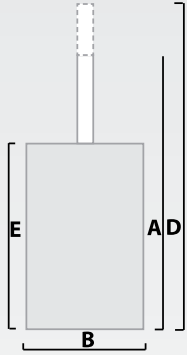

Loading aperture 16"

Cycle time 30 secs.

RAM force
6,600 lbs. (33 p.s.i.)

Chamber dimension
(internal)
Width: 16"
Height: 32"

Weight (machine)
Total: 700 lbs.

Noise level < 62 db (A)

Protection class IP 55

Operating power
Single Phase 115V, 60Hz, 16A

Carton emptying

Dairies and other perishable food manufacturers sometimes have to reject batches of liquid filled packs. Orwak 5030-CE compacts the packs forcing liquid to drain off from the container.



Liquid separation. Critical components made in stainless steel.



During compaction the liquid continuously drains out of the 2 inch pipe.

For more info. contact us or visit our website www.orwak.us
We reserve the right to make changes to specifications without prior notice.
Bale/bag/bin weights are dependent upon material type.