



Orwak 5030-N HD

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving

Features

- Top loading
- Single phase
- Compacts hazardous waste directly into drums



Technical specifications

Dimensions 5030-N HD

A:	7'2"
B:	34"
C:	51"
D:	80"
E:	52"


An easy-to-operate top loading machine

Compacts hazardous waste, such as glass and cans/tins with paint, oil and other chemical remains directly into drums.

With Orwak 5030-N HD the handling, transportation and disposal of chemical waste becomes safe and simple.

Operator easily handles the heavy duty steel pallet with standard pallet lifter.

Available with a pneumatic/hydraulic system to operate in an explosive environment.

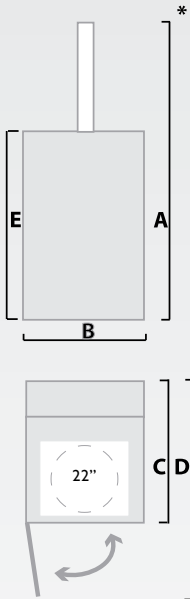

Loading aperture 22"

Cycle time 30 sec.

RAM force 6,600 lbs (21 p.s.i.)

Drum size
Width: 24"
Height: 39"

Weight (machine)
Total: 740 lbs

Noise level 70 db

Protection class IP 55

Operating power
Single phase, 115V, 60Hz, 16A



Standard drums can be used for storage and transport of the hazardous waste. By using several drums, sorting is possible.

*For more info. contact us or visit our website www.orwak.us
We reserve the right to make changes to specifications without prior notice.
Bale/bag/bin weights are dependent upon material type.*