



Orwak 5030

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving
- Open design for easy cleaning and maintenance
- Key components made of stainless steel
- Reduce volume of trash up to 10:1
- Reduce size and/or number of dumpsters
- Eliminate after-dark trips to dumpster

Features

- Top loading
- Small footprint
- Single phase
- The "bag compactor"
- Bag protected during compaction process
- Rolls on casters




Technical specifications

Dimensions 5030

- A: 6'5"
- B: 31"
- C: 40"
- D*: 8'9" (5030C - 7'9")
- E: 44"

*Emptying position

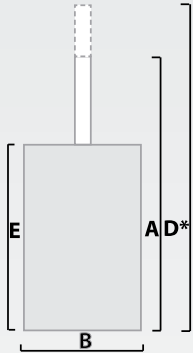

The classic waste compactor

Back in 1971 Orwak invented the ingenious idea of placing the bag on the outside of a bottomless drum.


The drum is then protecting the bag while compacting. No more torn bags! Load your kitchen garbage or recyclable materials into the drum, pull the power head forward and start compacting. Repeat loading until the drum is full. Release the drum and it will rise leaving the bag on the base plate, easy to remove. A typical quick-service restaurant can compact 12-18 lobby bags of trash into one 5030 bag - that is up to 10:1 compaction!



Emptying height 8'9" standard, 7'9" option.
For shorter versions contact Orwak.

The compact size of the 5030 makes it easy to locate even in limited spaces.

A compacted and well sealed bag prevents leakage and odors.
User friendly and flexible.

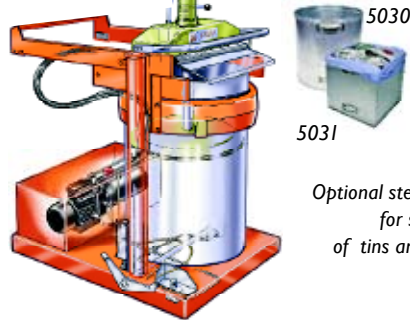

5031

Optional steel containers for safe handling of tins and glass after compaction.

Wheeled - for easy cleaning.

Key components made from stainless steel.

The Orwak 5030 is also available in special models for liquid separation for the food industry, for environmentally hazardous waste and for marine use.

Big reduction in volume

In 30 seconds your waste is reduced by up to 10:1. That means better hygiene and a better working environment, more free space and better safety at work. Not to mention drastically reduced costs of collection and transport.

Loading aperture	ø20"
Cycle time	30 sec.
RAM force	6,600 lbs (21 p.s.i.)
Chamber dimension (internal)	
Width:	ø20"
Height:	32"
Weight (machine) Total:	680 lbs.
Noise level	62 db
Protection class	IP 55
Operating power	
Single phase 115V, 60Hz, 16 A	

Compacted bag weight: 50-120 lbs.*

*depending on material



The Orwak bag lifter. Eliminates manual heavy lifting when moving bag out and into dumpster

For more info. contact us or visit our website www.orwak.us
We reserve the right to make changes to specifications without prior notice.
Bale/bag/bin weights are dependent upon material type.